

AIR CONDITIONING



Air Conditioning
350W



AVC 035



GRUBER Electric Ges.m.b.H.

A-2542 KOTTINGBRUNN, INDUSTRIESTRASSE 4
Tel. +43-2252-251080-0 / Fax +43-2252-251080-30
Internet: www.gruber-electric.at Email: office@gruber-electric.at

Komponenten für Steuerungsbau und Industrieelektronik

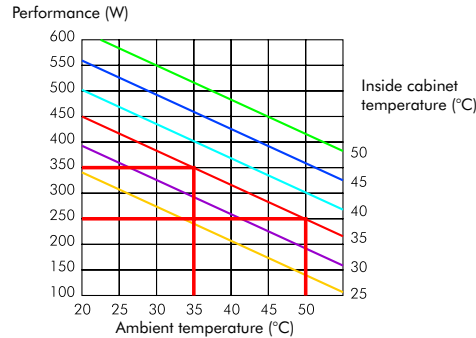

Features	Unit	AVC035.00	AVC035.01	AVC035.10	AVC035.11	AVC035.20	AVC035.21
Power supply	V/Hz	230V/1ph/50-60		115V/1ph/50-60		400V/1ph/50-60	
Dimensions HxWxD	mm	430x280x170					
Cooling capacity EN814 A35A35	W	350/370					
Cooling capacity EN814 A35A50	W	200/220					
Air flow rate (free blow)	inside	m3/h 165/200					
	outside	m3/h 360/420					
Max current	A	1.8/1.9		3.6/3.8		1/1.1	
Delayed fuse	A	4		6		4	
Absorbed electric power EN814 A35A35	W	260/270					
Absorbed electric power EN814 A35A50	W	280/300					
Refrigerant (type/charge)	kg	R134a/0,2					
Maximum Pressure	bar	25					
Operating temperature (ambient)	°C	+20/+55					
Operating temperature (enclosure)	°C	+20/+45					
Temperature controller (factory set at 35°C)	-	Integrated mechanical thermostat	Integrated digital thermostat	Integrated mechanical thermostat	Integrated digital thermostat	Integrated mechanical thermostat	Integrated digital thermostat
Compressor type	-	Rotative compressor					
Noise level	dB(A)	60					
Electrical connection	-	Three-pole connector					
Protection degree EN60529/1 enclosure inside	-	IP54					
Protection degree EN60529/1 ambient inside	-	IP34					
Weight (with packaging)	kg	15(16)		18(19)			
Colour	-	RAL 7035					
Conformity/Certifications	-	CE					

Accessories

Door limit switch	FINCOR
Door limit switch with mechanical lock	FINRIP
Flashing safety device	FSL
Flow diverter*	FD035

